


# 技术资料书

## 聚酰亚胺胶带

产品编号 : 1K22A  
(阻燃性)

### P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.  
Telephone : (852) 2604-8222 \* Facsimile : (852) 2693-2093  
E-mail : sales@pleo.com \* Web Site : <http://www.pleo.com>

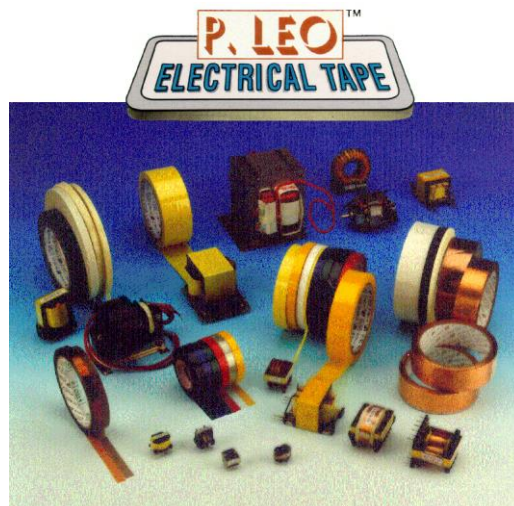

UL FILE #E126174

说明 : 1K22A 聚酰亚胺胶带采用 1 mil (0.025mm)厚的聚酰亚胺薄膜涂上一层高温改良的特有无卤素丙烯酸酯胶粘剂而成。 本产品符合 UL510 阻燃要求。

用途 : 适用于高温线圈、发电机和变压器上。 本产品具有优良的韧性、耐击穿及一致性， 可应用于 F 级到 N 级的绝缘系统中。

性能	单位	规格
颜色	-	琥珀色 (茶色)
总厚度	mm (mil)	0.06 ± 0.003 (2.4)
基材厚度	mm (mil)	0.025 (1)
拉伸强度	kg/25mm (lb/in)	11 (24)
伸长率	%	50
黏着力	kg/25mm (oz/in)	0.7 (24)
击穿电压	kV	5
耐热等级	°C	180

测试方法 : 根据 ASTM 标准测试

保存期限 : 六个月 (温度: 73F 湿度: 65%)

包装标准 : 每卷长 33M, 宽 500mm, 卷心直径 3 英寸

#### ***Important Notice to Purchase***

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or the inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

仅供参考, 如与英文版有歧异之处, 一切内容以英文版为准。

