


# 技术资料书

## “PPS”胶带 产品编号：1PS25

### P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.  
Telephone : (852) 2604-8222 \* Facsimile : (852) 2693-2093  
E-mail : sales@pleo.com \* Web Site : http://www.pleo.com

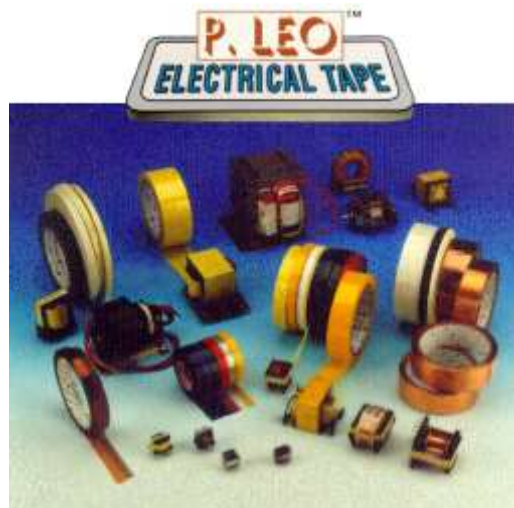

UL FILE #E126174

说明： 1PS25 PPS 胶带是在 PPS (聚苯硫醚) 薄膜涂覆一层丙烯酸酯粘剂而成。PPS 薄膜具有优秀的耐热性、耐化学性和物理强度。

用途： 适用于铝箔电容、锂电池绝缘，或者高温变压器和 LED 背光源变压器。

技术数据：

性能	单位	规格
基材	-	PPS
颜色	-	自然色
接着剂	-	丙烯酸酯
总厚度	mm	0.060±0.006
基材厚度	mm	0.025
拉伸强度	kg/25mm(N/10mm)	10 (39.2)
伸长率	%	60
黏着力	kg/25mm(N/10mm)	1 (3.90)
击穿电压	kV	4
腐蚀系数	-	1.0
绝缘强度	ohm	1x10 <sup>12</sup>
耐热等级	°C	155



测试方法： 根据 ASTM 标准测试

保存期限： 六个月（温度：23°C 湿度：65%）

包装标准： 卷长33M 或 50M，最少宽度2mm起

### **Important Notice to Purchase**

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or \*he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

仅供参考，如与英文版有歧异之处，一切内容以英文版为准。

