


技術資料書

聚酰亞胺膠帶 產品編號:1K22A (阻燃性)

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 2693-2093
E-mail : sales@pleo.com * Web Site : http://www.pleo.com

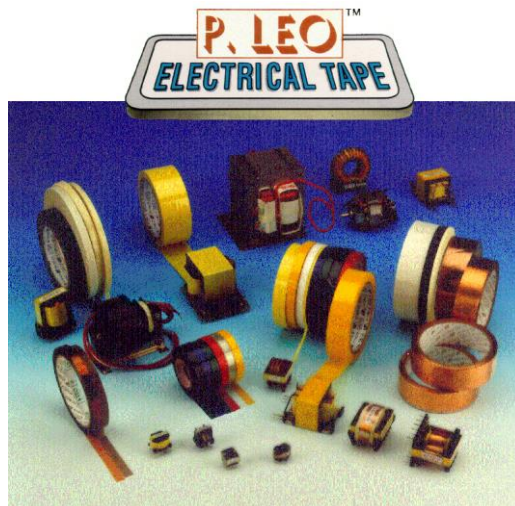

UL FILE #E126174

說明： 1K22A 聚酰亞胺膠帶採用 1mil (0.025mm) 厚的聚酰亞胺薄膜塗上一層高溫改良的特有無鹵素丙烯酸酯膠粘劑而成。本產品符合 UL510 阻燃要求。

用途： 適用於高溫線圈、發電機和變壓器上。本產品具有優良的韌性、耐擊穿及一致性，可應用於 F 級到 N 級的絕緣系統中。

技術資料：	性能	單位	規格
	顏色	-	琥珀色(茶色)
	總厚度	mm (mil)	0.06 ± 0.003 (2.4)
	基材厚度	mm (mil)	0.025 (1)
	拉伸強度	kg/25mm (lb/in)	11 (24)
	伸長率	%	50
	黏著力	kg/25mm (oz/in)	0.7 (24)
	擊穿電壓	kV	5
	耐熱等級	C	180

測試方法： 據 ASTM 標準測試

保存期限： 六個月（溫度：73F 濕度：65%）

包裝標準： 每卷長 33M，寬 500mm，卷心直徑 3 英寸

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or the inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection therewith.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考，如與英文版有歧異之處，一切內容以英文版為準



Copyright © P. LEO 2009 Rev. 1